

# CAT5E 350MHz (CMR) Riser



PART NUMBER: CBL-C5E-350-CMR-BU | CBL-C5E-350-CMR-WH

## PRODUCT DESCRIPTION

U/UTP, 24AWG SOLID BARE COPPER, CAT .5E, CMR WITH RIP CORD

## PRODUCT FEATURES

HIGH PERFORMANCE OF TRANSMISSION.  
HUGH QUALITY OF SAFETY PROPERTY.  
SWEEP FREQUENCY UP TO 350 MHZ.  
REELEX II CARTON AND EASY TO PULL OUT.  
CARTON WITH ONE LAYER CORRUGATED DESIGN PROVIDING SUFFICIENT STRENGTH AND SAVING PACKAGING SPACE.

## APPLICATION

STRUCTURE CABLING FOR HORIZONTAL AND BUILDING BACKBONE CABLE.  
TRANSMISSION OF DIGITAL AND ANALOGUE FOR DATA, VIDEO, AND AUDIO APPLICATIONS.  
IEEE 802.3U 100BASE-T AND LEGACY SPEEDS.  
CDDI/ATM/TOKEN RING.  
IEEE 802.3AF (POE) / IEEE 802.3AT (POE+)

## APPLICABLE STANDARD

### ELECTRICAL TRANSMISSION

ANSI/TIA-568-C.2 (2009)  
ISO/IEC 11801 (EDITION 2.2)  
IEC 61156-5 (EDITION 2.1)  
UL 1666 (CMR)  
UL 444 | CSA 22.2 NO.214

### FLAME TEST

### MATERIAL AND CONSTRUCTION

EU DIRECTIVE 2011/65/EU (ROHS2)  
EU DIRECTIVE 2006/95/EC (LVD)  
CE COMPLIANCE DATE: 2010.01.01

## USAGE & ENVIRONMENTAL CONDITION

### TEMPERATURE RANGE

### STORAGE & SHIPPING:


### INSTALLATION:

### OPERATION:

### MINIMUM BENDING RADIUS:

### MAXIMUM PULLING TENSION:

-20°C TO 75°C  
0°C TO 60°C  
-20°C TO 60°C  
≥ 4 TIMES OF OVERALL DIAMETER  
≤ 110 N

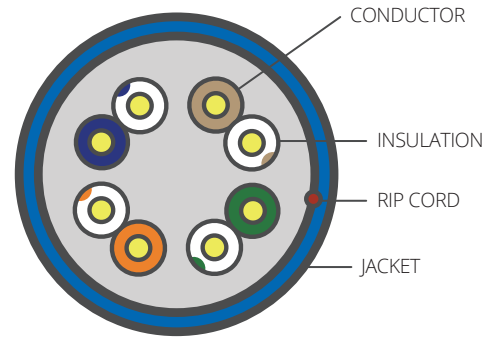

## MATERIAL AND CONSTRUCTION

**CONDUCTOR:** 24AWG SOLID BARE COPPER  
**INSULATION MATERIAL:** POLYOLEFIN (PO)  
**COLOR CODE & DIAMETER:** BLUE & WHITE/BLUE STRIPE: 0.87 ± 0.02MM | ORANGE & WHITE/ORANGE STRIPE: 0.86 ± 0.02MM | GREEN & WHITE/GREEN STRIPE: 0.87 ± 0.02MM | BROWN & WHITE/BROWN STRIPE: 0.86 ± 0.02MM  
**TWISTED:** LEFT HAND DIRECTION  
**ASSEMBLY:** LEFT HAND DIRECTION  
**RIP CORD:** POLYESTER MULTI-YARN  
**JACKET MATERIAL:** FLAME RETARDANT POLYVINYL CHLORIDE (FRPVC)  
4.8 + 0.2MM  
**JACKET DIAMETER:** 4.8 + 0.2MM  
**JACKET THICKNESS:** 0.45 + 0.05MM  
**JACKET COLOR:** PER CUSTOMER'S REQUEST

## TRANSMISSION PERFORMANCE (AT 20 °C)

Frequency (MHZ)	IL (db/100m) Max	NEXT (db/100m) Min	PS NEXT (db/100m) Min	ACR (db/100m) Min	PS ACR (db/100m) Min	ACRF (db/100m) Min	PS ACRF (db/100m) Min	RL (db/100m) Min	Propagation Max. ns/100m	Delay Skew Max. ns/100m
1	2.04	65.30	62.30	63.26	60.26	63.80	60.80	20.00	570.00	45.00
4	4.05	56.27	53.27	52.22	49.22	51.76	48.76	23.01	552.00	45.00
8	5.77	51.75	48.75	45.99	42.99	45.74	42.74	24.52	546.73	45.00
10	6.47	50.30	47.30	43.83	40.83	43.80	40.80	25.00	545.38	45.00
16	8.25	47.24	44.24	38.99	35.99	39.72	36.72	25.00	543.00	45.00
20	9.27	45.78	42.78	36.52	33.52	37.78	34.78	25.00	542.05	45.00
25	10.42	44.33	41.33	33.91	30.91	35.84	32.84	24.32	541.20	45.00
31.25	11.72	42.88	39.88	31.15	28.15	33.90	30.90	23.64	540.44	45.00
62.5	16.99	38.36	35.36	21.37	18.37	27.88	24.88	21.54	538.55	45.00
100	21.98	35.30	32.30	13.33	10.33	23.80	20.80	20.11	537.60	45.00
150	27.54	32.66	29.66	5.11	2.11	20.28	17.28	18.87	536.94	45.00
200	32.42	30.78	27.78	N.A.	N.A.	17.78	14.78	18.00	536.55	45.00
250	36.85	29.33	26.33	N.A.	N.A.	15.84	12.84	17.32	536.28	45.00
300	40.97	28.14	25.14	N.A.	N.A.	14.26	11.26	16.77	536.08	45.00
350	44.85	27.14	24.14	N.A.	N.A.	12.92	9.92	16.30	535.92	45.00